


Rectangular Electro Permanent Chuck with T-Slots

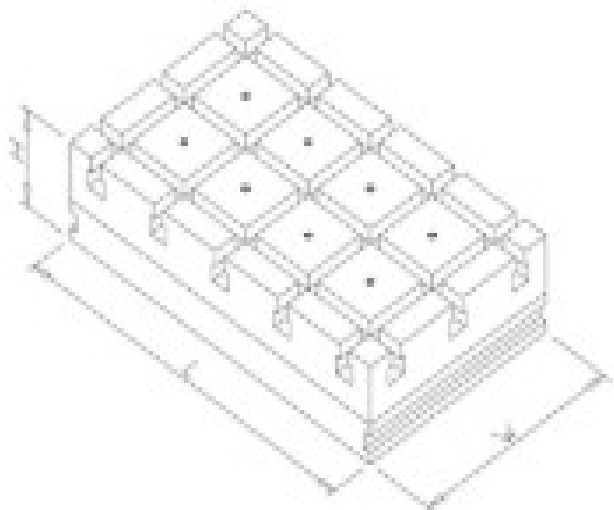

- T-Slots in Magnetic Face
- Rigid and Robust Construction
- Power Fail Safe. Stays on without Electricity
- Variable Magnetic Power
- No Epoxy * No Expansion * No Deformation
- High Accuracy with Minimal Set-up Time

W	L	H		Art No.	Controller
(mm)	(mm)	(mm)			
250	400	90		13130.01	93101.01
	600			13130.02	
	800			13130.03	
	1000			13130.04	
300	400			13130.05	
	600			13130.06	
	800			13130.07	
	1000			13130.08	
400	400			13130.09	
	600			13130.10	
	800			13130.11	
	1000			13130.12	
500	400			13130.13	
	600			13130.14	
	800			13130.15	
	1000			13130.16	93101.02
600	600			13130.17	93101.01
	800			13130.18	93101.02
	1000			13130.19	