


Round Electro Permanent Chuck (Radial)


Magnetic Power above 100 MT/m²
Double Magnet Circuit High Power
Power Fail Safe. Stays on without Electricity
Static Design - No Moving Parts - Robust
Center Holes Can Locate Parts
High Accuracy with Minimal Set-up Time

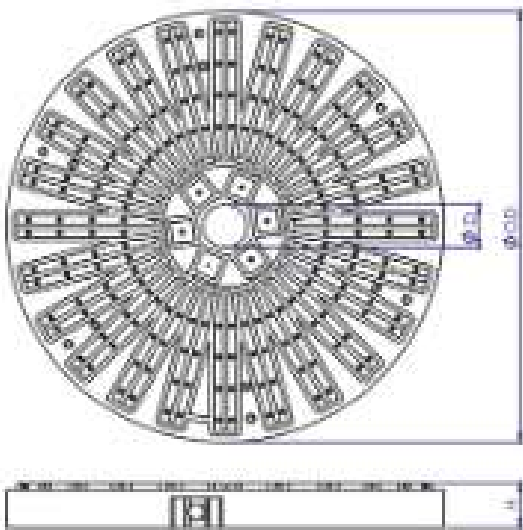

OD	ID		H	Art No.	Controller
(mm)	(mm)		(mm)		
300	80		90	13204.01	93101.01
450	125			13204.02	
500	150			13204.03	
600	200			13204.04	
800	250			13204.05	
1000	250			13204.06	
1250	500			13204.07	93101.02
1500	500			13204.08	
1750	500			13204.09	
2000	500			13204.10	
2500	600			13204.11	

Round Electro Permanent Chuck (Radial-P)

Radially Movable Location Blocks
Mobile Pole Extensions for Irregular Parts
Power Fail Safe. Stays on without Electricity
High Rigidity and Robustness
High Resistance to Coolant
High Accuracy with Minimal Set-up Time

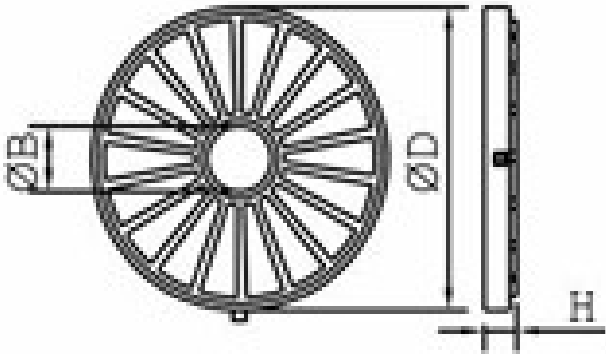

OD	ID		H	Art No.	Controller
(mm)	(mm)		(mm)		
300	80		90	13201.01	93101.01
450	125			13201.02	
500	150			13201.03	
600	200			13201.04	
800	250			13201.05	
1000	250			13201.06	
1250	500			13201.07	93101.02
1500	500			13201.08	
1750	500			13201.09	
2000	500			13201.1	
2500	600			13201.11	